


FX0280 Datasheet

Product Name // Fuseholder Protection Category PC1 In-Line Clear Screw Termination 6.3mm x 25mm Fuse

 [View Product Page](#)

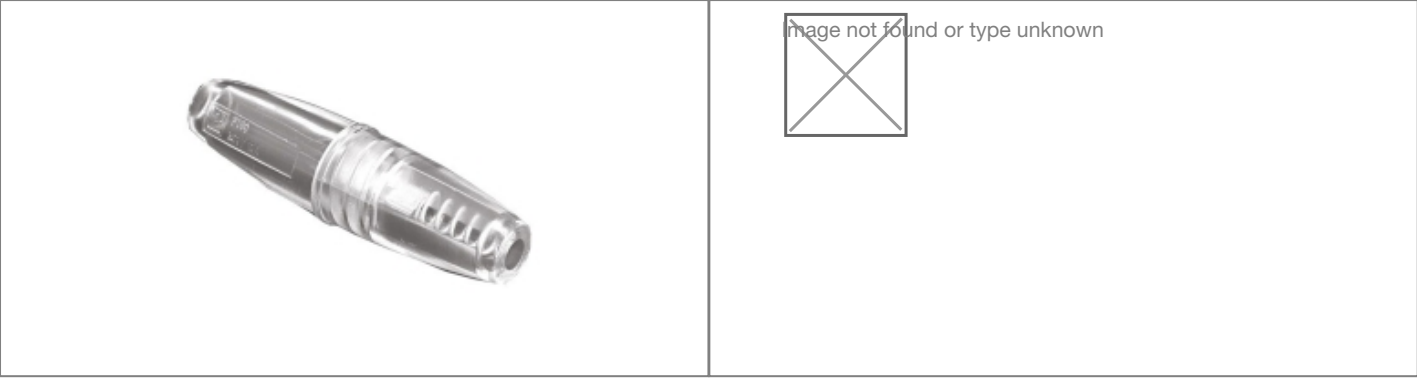

// Product Description:



Protection Category PC1 In-Line Fuseholders



Screw Termination



Part codes prefixed FX0385, FX0285, FX0185 are IP66 Sealed



Choice of fuse size depending on part code:



Part codes prefixed FX0380, FX0385 - 5mm x 20mm fuse



Part codes prefixed FX0280, FX0285 - 6.3mm x 25mm fuse



Part codes prefixed FX0180, FX0185 - 6.3mm x 32mm fuse



Choice of colour depending on part code: Black (part codes suffixed /BK) or Clear (no suffix)



Part codes prefixed FX0380, FX0280, FX0180 have 4.8mm diameter cable entry



Part codes prefixed FX0385, FX0285, FX0185 have three stage stepped grommet accomodating cable diameters: 2mm - 2.64mm, 1.5mm - 1.9mm, 1mm - 1.4mm

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Material:

Current Max:

Flamability Rating:

Function:

Fuseholder Colour:

Fuseholder Protection Category:

Fuse Size:

Max Operating Temperature:

Min Operating Temperature:

Voltage Max:

Protection Category PC1 In-Line Fuseholders

Fuseholders

In-Line PC1 and In-Line Sealed to IP66, PC1

Polybutene (PB-1)

10A

UL94HB

Pc1 Fuseholder

Clear

PC1

6.3mm x 25mm

+90°C

-20-∞C

50V

// Product PDF Links



[Fuseholders product data](#)

// Product 3D CAD Model Links



[FX02803D CAD Model](#)