


# FX0296 Datasheet

Product Name // Fuseholder FX0296 Range Protection

Category PC1 Panel Mount Solder Tag Termination 5mm x 20mm Fuse Screw Cap Carrier Hand Release



View Product Page

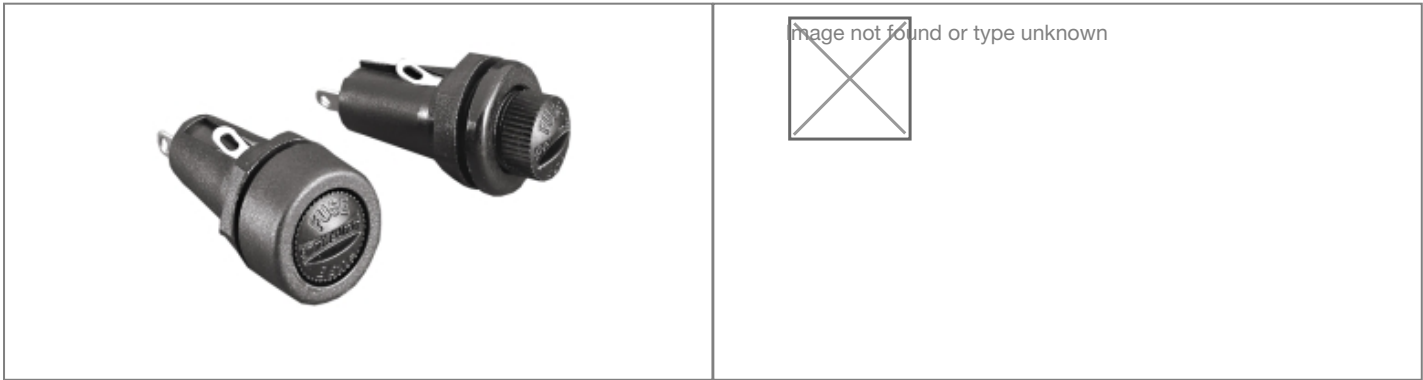

// Product Description:

- Protection Category PC1 Fuseholder
  - 5mm x 20mm fuse carrier, Screw Cap
  - Choice of cap size and release method, depending on part code:
  - FX0296 - standard cap, Hand Release
  - FX0296/S - standard cap, Screwdriver Release
- FX0296/1 - large cap, Hand Release
  - Panel mount
  - Solder Tag Termination
  - Insulation Boot for rear of connector available separately (part code 9820)

// General Information:

|                                 |                                    |
|---------------------------------|------------------------------------|
| Product Display Title:          | Protection Category PC1 Fuseholder |
| Product Family:                 | Fuseholders                        |
| Product Series:                 | PC Mounting PC1, PC2 and PC3       |
| Body Material:                  | Nylon 66 - Glass Filled            |
| Current Max:                    | 6.3A                               |
| Flamability Rating:             | UL94V-0                            |
| Function:                       | Pc1 Fuseholder                     |
| Fuseholder Protection Category: | PC1                                |
| Fuse Carrier:                   | Screw Cap/Hand Release             |
| Fuse Size:                      | 5mm x 20mm                         |
| Max Operating Temperature:      | +85°C                              |
| Min Operating Temperature:      | -20~∞C                             |
| Voltage Max:                    | 250V                               |

// Product PDF Links



// Product 3D CAD Model Links



Have a question or project enquiry  
you'd like to talk to us about?



Click Here To Contact Us