


FX0342 Datasheet

 [View Product Page](#)

**Product Name // Fuseholder Protection Category PC1 PCB
Mount 2 PCB Spills 5mm x 20mm Fuse Screw Cap Carrier
Hand Release**

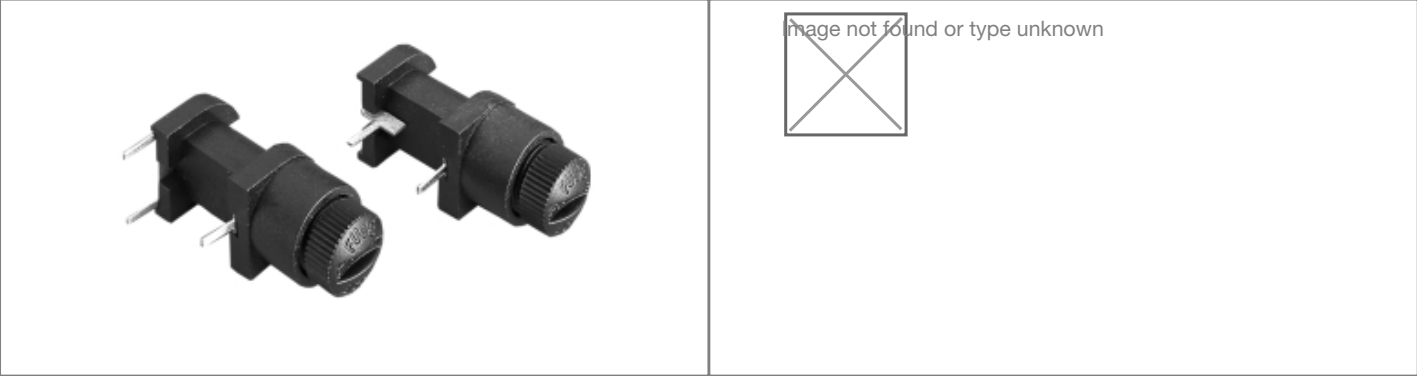

// Product Description:

- PCB Mount Protection Category PC3 Fuseholders
 - 5mm x 20mm fuse carrier, Screw Cap, Hand Release
 - Choice of Termination, depending on part code:
- FX0342: Two PCB Spills
 - FX0330: Three PCB Spills (twin PCB Spills at rear)

// General Information:

Product Display Title:	PCB Mount Protection Category PC3 Fuseholders
Product Family:	Fuseholders
Product Series:	PC Mounting PC1, PC2 and PC3
Body Material:	Nylon 66 - Glass Filled
Current Max:	6.3A
Flamability Rating:	UL94V-0
Function:	Pc1 Fuseholder
Fuseholder Mounting Hole:	2 or 3 Mounting Holes
Fuseholder Protection Category:	PC1
Fuse Carrier:	Screw Cap/Hand Release
Fuse Size:	5mm x 20mm
Max Operating Temperature:	+85°C
Min Operating Temperature:	-20~∞C
Voltage Max:	250V

// Product PDF Links

 [Fuseholders product data](#)

// Product 3D CAD Model Links

 [FX03423D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)