


FX0369/2 Datasheet

 [View Product Page](#)

Product Name // Fuseholder FX0367-FX0369 Range
Protection Category PC2 Snap Fit To Panel Square Bezel
Solder Tag Termination 2mm-3mm Panel 5mm x 20mm
Fuse Bayonet Cap Carrier Screwdriver Release

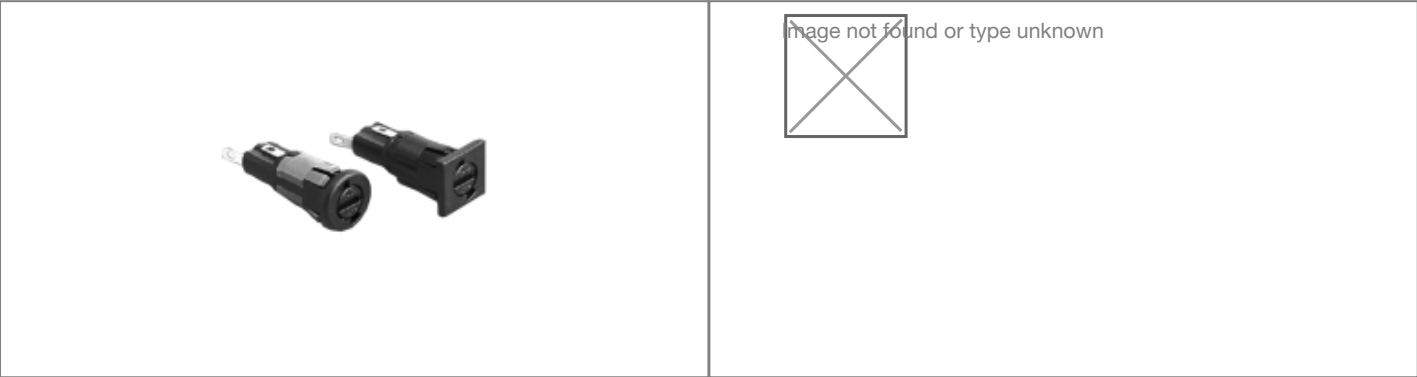

// Product Description:

- | | |
|---|--|
| <ul style="list-style-type: none">Protection Category PC2 Touchproof Fuseholder5mm x 20mm fuse carrier, Bayonet Cap, Screwdriver ReleaseSnap Fit To Panel mount, choice of panel thickness depending on part code: /1 - 1mm-1.5mm (black sleeve), /2 - 2mm-3mm (grey sleeve)Solder Tag Termination | <ul style="list-style-type: none">Choice of bezel depending on part code: Circular (part codes prefixed FX0367) or Square (part codes prefixed FX0369)Insulation Boot for rear of connector available separately (part code 11327)Also available as Panel Mount (FX0357, FX0359) |
|---|--|

// General Information:

Product Display Title:	Protection Category PC2 Touchproof Fuseholder
Product Family:	Fuseholders
Product Series:	PC Mounting PC1, PC2 and PC3
Change Notes:	MK-009921-SL
Approvals:	CSA, UL, VDE
Body Material:	Polyester (PET)
Current Max:	10A, 16A
Flamability Rating:	UL94V-0
Function:	Pc2 Fuseholder
Fuseholder Bezel Shape:	Square Low Profile Bezel
Fuseholder Mounting Hole:	D Shape Mounting Hole
Fuseholder Protection Category:	PC2
Fuse Carrier:	Bayonet Cap/Screwdriver Release
Fuse Size:	5mm x 20mm
Max Operating Temperature:	+85°C
Min Operating Temperature:	-20~∞C
Max Panel Thickness:	3mm
Min Panel Thickness:	2mm
Voltage Max:	250V

// Product PDF Links



// Product 3D CAD Model Links

