


PF0033/30/28 Datasheet

Product Name // IEC Connector Snap Fit To Panel Twin Fused Inlet PF0033 Series 3mm Panel 2.8mm Solder Tag Termination EN60 320-1 Standard Sheet C14 Class I

 [View Product Page](#)



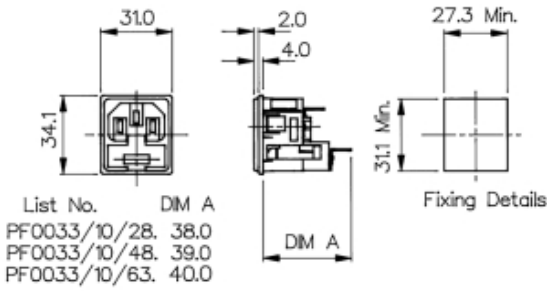

List No.	DIM A
PF0033/10/28.	38.0
PF0033/10/48.	39.0
PF0033/10/63.	40.0

// **Product Description:**

- Snap Fit Panel Mount Twin Fused IEC Inlets
- EN60 320-1 Standard Sheet C14 Class I
- Twin Fused, 5mm x 20mm fuses
- Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm

- Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab
- Insulation Boot for rear of connector available separately (part code 14317)
- Mate with PX0587, PX0587/SE, PX0588

// **General Information:**

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Current Max:

Flamability Rating:

Function:

Iec Connector Mates With:

Iec En60620 Type:

Max Operating Temperature:

Min Operating Temperature:

Max Panel Thickness:

Min Panel Thickness:

Number Of Contacts:

Voltage Max:

Snap Fit Panel Mount Twin Fused IEC Inlets

IEC Connectors

IEC60320 Main Inlets and Outlets

CSA

Nylon 66

10A

UL94V-0

Panel Mount Fused Connector

PX0587,PX0587/SE,PX0588

EN60 320-1 Standard Sheet C14 Class I

+70°C

-20°C

3mm

3mm

3 Contacts

250V

// **Product PDF Links**

 [IEC Connectors product data](#)

// **Product 3D CAD Model Links**

 [PF0033/30/283D CAD Model](#)