
PXEB5223C005 Datasheet



Product Name // 2 Channel Flange Mount to SC Connector Cable Assembly



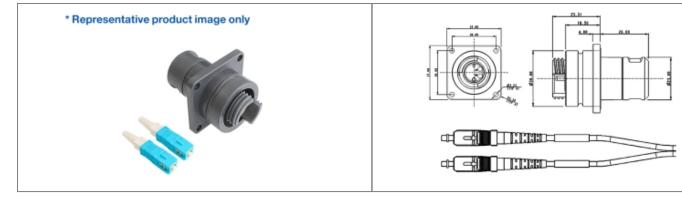

// Product Description:

- A Terminated Flange Mount Bulkhead (FMBH) Connector with 2 (OM3) SC terminated independent cables - 5m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Flange Mount Lanyard Included
- Mates with Plug Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- O Available in 2 Channel
- O Available in Flange Mount to LC Cable Assembly

// General Information:

Product Display Title: 2 Channel Flange Mount to SC Connector Cable Assembly

 Product Family:
 Circular Fiber Connectors

 Product Series:
 5000 Series Expanded Beam

Max Insertion Loss:<2dB</th>Avg Insertion Loss:<1.5dB</th>Body Colour:Dark Grey

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Body Material Type: Plastic Body
Contact Type: Expanded Beam
Coupling Type: Screw

Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm
Fibre Mode: OM3

Flamability Rating: UL94V-0
Function: EB Flange Mount to SC Double Ended Fiber Cable

Ip Rating: IP68

Material Finish:MattMax Operating Temperature:+80°CMin Operating Temperature:-50°CRohs Compliant:Yes

// Product PDF Links 5000 Series Expanded Beam Product...

