


PF0007/63/WH Datasheet

 [View Product Page](#)

Product Name // IEC Connector Flange Mount Fused Inlet
with Isolated Fuse Contacts 2 Pin PF0007 Series White
6.3mm Tab Termination EN60 320-1 Standard Sheet C18
Class II

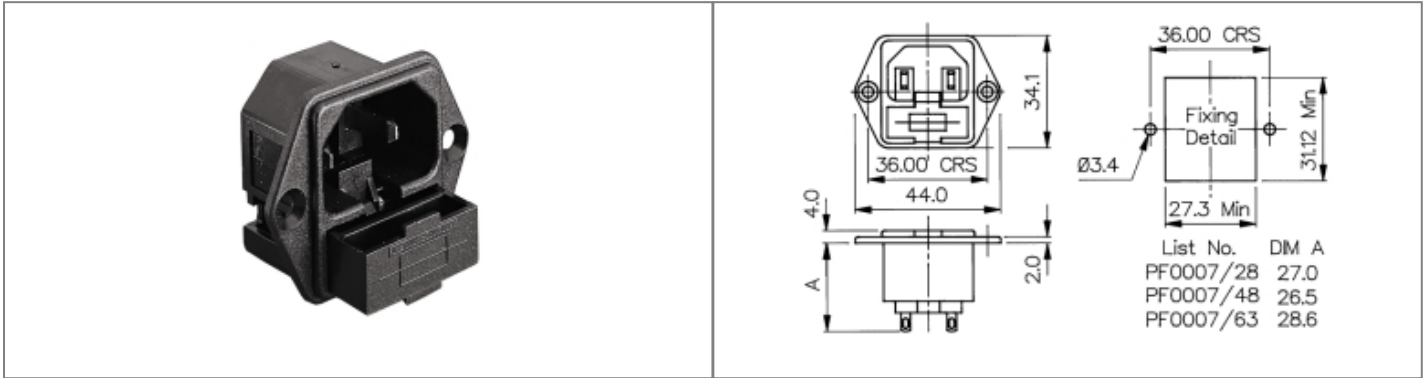

// Product Description:

- Flange Mount Fused IEC Inlets
- EN60 320-1 Standard Sheet C18 Class II
- Cold Condition
- Two Pin Class II (no Earth pin)
- Single 5mm x 20mm fuse
- Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab
- Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
- PF0007 Series has same specification as PF0006 Series but with fuse contacts isolated
- Insulation Boot for rear of connector available separately (part code 11987)
- Mate with PX0587, PX0587/SE, PX0588

// General Information:

Product Display Title:	Flange Mount Fused IEC Inlets
Product Family:	IEC Connectors
Product Series:	IEC60320 Main Inlets and Outlets
Approvals:	CSA, UL, RCM
Body Material:	Nylon 66
Current Max:	10A
Flamability Rating:	UL94V-0
Function:	Flange Mount Fused Connector
Iec Connector Colour:	White
Iec Connector Mates With:	PX0587,PX0587/SE,PX0588
Iec En60620 Type:	EN60 320-1 Standard Sheet C18 Class II
Max Operating Temperature:	+70°C
Min Operating Temperature:	-40°C
Number Of Contacts:	2 Contacts
Voltage Max:	250V

// Product PDF Links

 [IEC Connectors product data](#)

// Product 3D CAD Model Links

 [PF0007/63/WH3D CAD Model](#)