
# PF0011/10/48/GY Datasheet



## Product Name // IEC Connector Snap Fit To Panel Fused Inlet PF0011 Series 1mm Panel Grey 4.8mm Tab Termination EN60 320-1 Standard Sheet C14 Class I

🚯 View Product Page

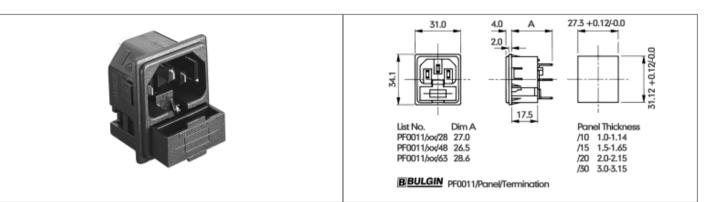

### // Product Description:

- O Snap Fit Panel Mount Fused IEC Inlets
- O EN60 320-1 Standard Sheet C14 Class I
- O Cold Condition
- O Single 5mm x 20mm fuse with spare fuse facility
- Choice of panel thickness depending on part code: /10 1mm, /15 1.5mm, /20 2mm, /30 3mm
- Choice of Termination depending on part code: /28 2.8mm
  Solder Tag, /48 4.8mm Tab, /63 6.3mm Tab, /PC PCB Spills
- Choice of colour depending on part code: /WH White, /GY -Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
- O Insulation Boot for rear of connector available separately (part code 11987) for all versions except PCB Mount
- O Mate with PX0587, PX0587/SE, PX0588

#### // General Information:

Product Display Title: Product Family: **Product Series:** Approvals: Body Material: **Current Max:** Flamability Rating: Function: lec Connector Colour: lec Connector Mates With: lec En60620 Type: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: Min Panel Thickness: Number Of Contacts: Voltage Max:

Snap Fit Panel Mount Fused IEC Inlets **IEC Connectors** IEC60320 Main Inlets and Outlets CSA, UL, CCC Nylon 66 10A UL94V-0 Panel Mount Fused Connector Grey PX0587.PX0587/SE.PX0588 EN60 320-1 Standard Sheet C14 Class I +70°C -40°C 1mm 1mm 3 Contacts 250V

#### // Product PDF Links

IEC Connectors product data

// Product 3D CAD Model Links

PF0011/10/48/GY3D CAD Model