
PF0011/15/28 Datasheet



Product Name // IEC Connector Snap Fit To Panel Fused Inlet PF0011 Series 1.5mm Panel Black 2.8mm Solder Tag Termination EN60 320-1 Standard Sheet C14 Class I

View Product Page

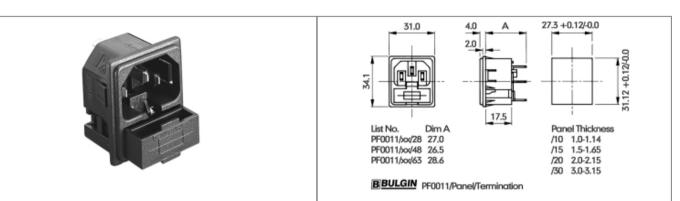

// Product Description:

- O Snap Fit Panel Mount Fused IEC Inlets
- C EN60 320-1 Standard Sheet C14 Class I
- O Cold Condition
- O Single 5mm x 20mm fuse with spare fuse facility
- Choice of panel thickness depending on part code: /10 1mm, /15 1.5mm, /20 2mm, /30 3mm
- Choice of Termination depending on part code: /28 2.8mm
 Solder Tag, /48 4.8mm Tab, /63 6.3mm Tab, /PC PCB Spills
- Choice of colour depending on part code: /WH White, /GY -Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
- O Insulation Boot for rear of connector available separately (part code 11987) for all versions except PCB Mount
- O Mate with PX0587, PX0587/SE, PX0588

// General Information:

Product Display Title: Product Family: **Product Series:** Approvals: Body Material: Current Max: Flamability Rating: Function: lec Connector Colour: lec Connector Mates With: lec En60620 Type: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: Min Panel Thickness: Number Of Contacts: Voltage Max:

Snap Fit Panel Mount Fused IEC Inlets **IEC Connectors** IEC60320 Main Inlets and Outlets CSA, ENEC, UL, VDE, CCC Nylon 66 10A UL94V-0 Panel Mount Fused Connector Black PX0587 PX0587/SF PX0588 EN60 320-1 Standard Sheet C14 Class I +70°C -40°C 1.5mm 1.5mm 3 Contacts 250V

// Product PDF Links

IEC Connectors product data

// Product 3D CAD Model Links

PF0011/15/283D CAD Model