
# PF0016/30/63/WH Datasheet



## Product Name // IEC Connector Snap Fit To Panel Fused Inlet 2 Pin PF0016 Series 3mm Panel White 6.3mm Tab Termination EN60 320-1 Standard Sheet C18 Class II





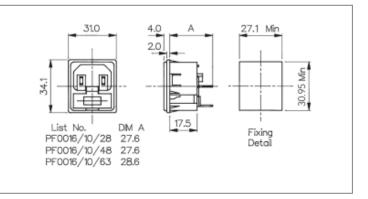

#### // Product Description:

- O Snap Fit Panel Mount Fused IEC Inlets
- EN60 320-1 Standard Sheet C18 Class II
- O Cold Condition
- 0 Two Pin Class II (no Earth pin)
- Single 5mm x 20mm fuse

- O Choice of panel thickness depending on part code: /10 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
- O Choice of Termination depending on part code: /28 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab
- O Choice of colour depending on part code: /WH White, /GY -Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
- Insulation Boot for rear of connector available separately (part code 11987)
- Mate with PX0587, PX0587/SE, PX0588

### // General Information:

**Product Display Title:** Product Family:

**Product Series:** 

Approvals:

**Body Material:** 

**Current Max:** 

Flamability Rating:

Function:

lec Connector Colour:

lec Connector Mates With:

lec En60620 Type:

Max Operating Temperature:

Min Operating Temperature:

Max Panel Thickness: Min Panel Thickness:

**Number Of Contacts:** 

Voltage Max:

Snap Fit Panel Mount Fused IEC Inlets

IEC Connectors

IEC60320 Main Inlets and Outlets

CSA, UL, RCM Nylon 66

10A

UL94V-0

Panel Mount Fused Connector

White

PX0587,PX0587/SE,PX0588

EN60 320-1 Standard Sheet C18 Class II

+70°C

-40°C

3mm

3mm

2 Contacts

250V

#### // Product PDF Links



// Product 3D CAD Model Links



PF0016/30/63/WH3D CAD Model