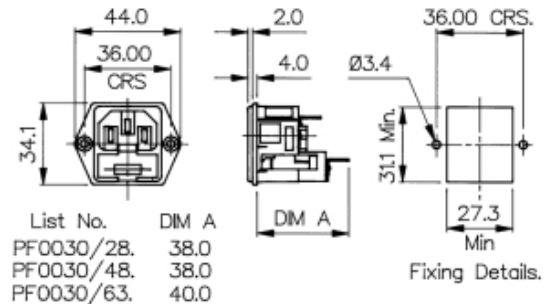


**Product Name // IEC Connector Flange Mount Twin Fused  
Inlet PF0030 Series 6.3mm Tab Termination EN60 320-1  
Standard Sheet C14 Class I**

[View Product Page](#)


### // Product Description:

- ⊕ Flange Mount Twin Fused IEC Inlets
- ⊕ EN60 320-1 Standard Sheet C14 Class I
- ⊕ Cold Condition
- ⊕ Twin Fused, 5mm x 20mm fuses
- ⊕ Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /PC - PCB Spills
- ⊕ Insulation Boot for rear of connector available separately (part code 14317) for all versions except PCB Mount
- ⊕ Retaining Clip KT0009 available separately for all versions except PCB Mount to prevent accidental removal of mating connector (for use with PX0587 Female Connector only)
- ⊕ Mate with PX0587, PX0587/SE, PX0588

### // General Information:

Product Display Title:	Flange Mount Twin Fused IEC Inlets
Product Family:	IEC Connectors
Product Series:	IEC60320 Main Inlets and Outlets
Approvals:	CSA, UL
Body Material:	Nylon 66
Current Max:	10A
Flamability Rating:	UL94V-0
Function:	Flange Mount Fused Connector
iec Connector Mates With:	PX0587,PX0587/SE,PX0588
iec En60620 Type:	EN60 320-1 Standard Sheet C14 Class I
Max Operating Temperature:	+70°C
Min Operating Temperature:	-20°C
Number Of Contacts:	3 Contacts
Voltage Max:	250V

#### // Product PDF Links

[IEC Connectors product data](#)

#### // Product 3D CAD Model Links

[PF0030/633D CAD Model](#)

#### // Product Certificate Links

[UL E92187 Certificate - PF0030](#)