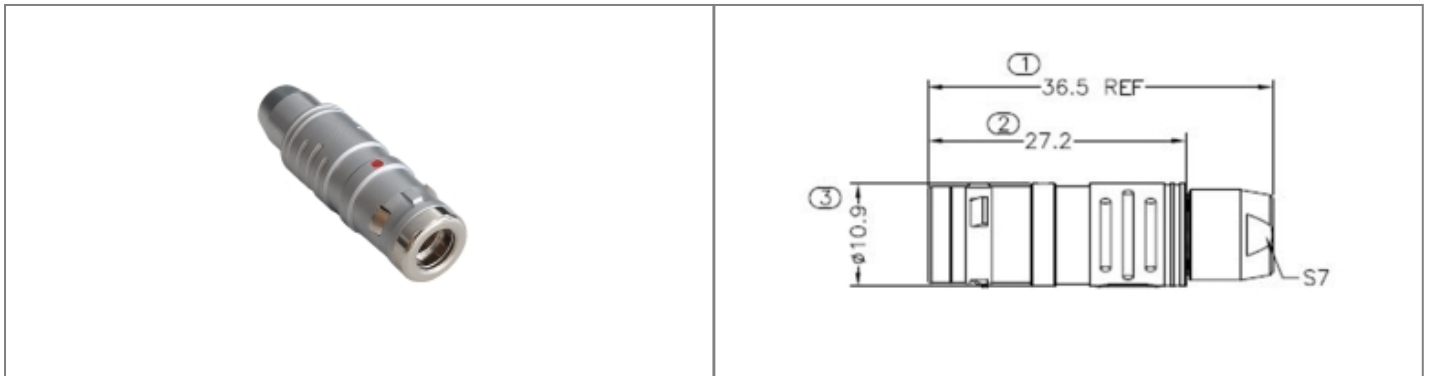


# PPCFGG0K02CLAD Datasheet

## Product Name // 2 Contacts Straight Plug 0Y Series Push Pull Connector

[View Product Page](#)


### // Product Description:

- ⊕ 2 Contacts Straight Plug 0Y Series Push Pull Connector
- ⊕ Available in Fixed Socket version
- ⊕ ROHS compliance
- ⊕ IP66 rated
- ⊕ Temp:-50 C to +200 C
- ⊕ Solder Terminals
- ⊕ Durability >4500 cycles
- ⊕ Operating humidity up to 95%
- ⊕ Salt Spray Corrosion Test >144h
- ⊕ High packing density for space savings on panel mounts

### // General Information:

Product Display Title:	0Y Series Straight Plug Push Pull Connector
Product Family:	Circular Automation Connectors
Product Series:	Push Pull Connectors Y Series
Contact Pin Material:	Brass gold plated 3u"
Current Max:	10A
Diameter Over Coupling Ring Mm:	10.9mm
Durability:	>4500 cycles
Function:	Straight Plug Push Pull Connector
Insulator:	PPS
Ip Rating:	IP66
Locking Sleeve Material:	Brass plated
Max Cable Entry Size:	5.0mm
Min Cable Entry Size:	4.5mm
Max Contact Accomodation Awg:	22AWG
Max Contact Accomodation Mm2:	0.34mm2
Max Operating Temperature:	+200°C
Min Operating Temperature:	-50°C
Number Of Contacts:	2 Contacts
Operating Humidity:	0.95
Pin Pin Terminal Voltage:	1300V
Pin Shell Terminal Voltage:	1050V
Push Pull Connector Series:	0Y Series
Rohs Compliant:	Yes
Salt Spray Corrosion Test:	48h
Shielding Efficiency Min:	95dB
Shielding Efficiency Max:	80dB
Shock Resistance:	100g
Terminal Diameter:	0.9mm
Vibration Resistance Min:	10Hz
Vibration Resistance Max:	2000Hz

#### // Product PDF Links

[Push-Pull Connector Y Series...](#)

#### // Product 3D CAD Model Links

[PPCFGG0K02CLAD3D CAD Model](#)


Have a question or project enquiry  
you'd like to talk to us about?



[Click Here To Contact Us](#)