PPCFGG3K08CLAD Datasheet




Product Name // 8 Contacts Straight Plug 3Y Series Push **Pull Connector**



* Representative product image only



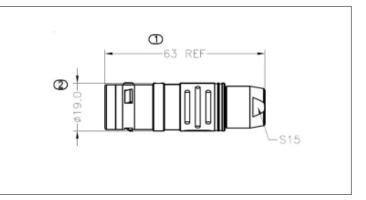

// Product Description:

- 0 8 Contacts Straight Plug 3Y Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP66 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series:

Contact Pin Material:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Function: Insulator:

Ip Rating:

Locking Sleeve Material: Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg:

Max Contact Accomodation Mm2:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Operating Humidity: Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage:

Push Pull Connector Series:

Rohs Compliant:

Salt Spray Corrosion Test: Shielding Efficiency Min:

Shielding Efficiency Max:

Shock Resistance:

Terminal Diameter: Vibration Resistance Min:

Vibration Resistance Max:

3Y Series Straight Plug Push Pull Connector

Circular Automation Connectors

Push Pull Connectors Y Series

Brass gold plated 3u"

19mm

>4500 cycles

Straight Plug Push Pull Connector

PPS

IP66

Brass plated 7.0mm

6.6mm

20AWG

0.50mm2 +200°C

-50°C

8 Contacts

0.95

1650V

1150V 3Y Series

Yes

48h

95dB

80dB

100g

1.3mm

10Hz

2000Hz

// Product PDF Links



// Product 3D CAD Model Links



PPCFGG3K08CLAD3D CAD Model