
PX0411/03S/5560 Datasheet



Product Name // Inline Cable Connector PX0411 Series 3 Contact Socket 5.5mm-6.0mm Cable

View Product Page

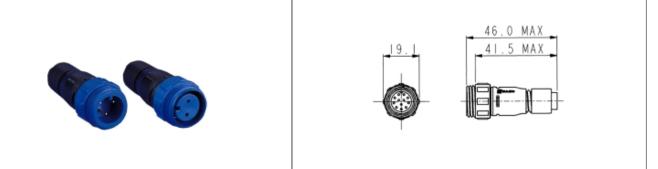

// Product Description:

- O Inline Cable Connector
- Water and dustproof to IP68 when mated with compatible connector
- O Pin or Socket
- O 2, 3, 4, 6, 8, 10 or 12 Contact
- O Crimp or Solder Contacts available (supplied separately; use 8A for 2/3 Contact, 5A for 4/6/8 Contact, 1A for 10/12 Contact)
- O Contact insertion and crimp tools available (supplied separately)
- O Choice of cable acceptance 3mm-7mm depending on part code; supplied with Cable Gland and Collet colour coded by size
- O PX0480/1 Sealing Cap available separately to maintain IP rating of unmated connectors
 - Mate with Flex Cable Connectors PX0400, PX0402, PX0410

// General Information:

Product Display Title:
Product Family:
Product Series:
Is Vitalis:
Approvals:
Body Material:
Redy Material Type:

Body Material: Body Material Type: Contact Type: Coupling Type: Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating: Function:

Ip Rating:
Max Cable Entry Size:
Min Cable Entry Size:
Max Contact Accomodation Awg:

Min Contact Accomodation Awg:
Min Contact Accomodation Awg:
Max Contact Accomodation Mm2:
Min Contact Accomodation Mm2:
Max Operating Temperature:
Min Operating Temperature:
Number Of Contacts:
Voltage Max:

Inline Cable Connector Circular Power Connectors 400 Series Buccaneer

No UL

Polyamide (PA)
Plastic Body
Socket Contact
Screw
8A
19.1mm

UL94V-0

IP68

Inline Cable Connector

6.0mm 5.5mm 24AWG 20AWG 0.5mm2 0.25mm2 +80°C -40°C 3 Contacts 250V



// Product 3D CAD Model Links

PX0411/03S/55603D CAD Model

