








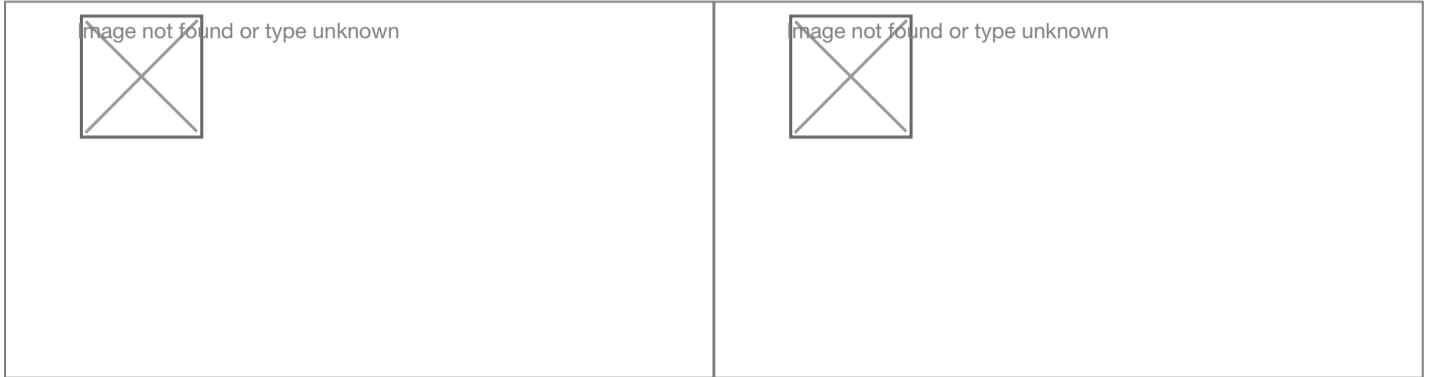

# PX0575/20/63/GY Datasheet

**Product Name // IEC Connector Snap Fit To Panel Inlet**  
**PX0575 Series 2mm Panel Grey 6.3mm Tab Termination**  
**EN60 320-1 Standard Sheet C14 Class I**

 [View Product Page](#)



## // Product Description:

-  Snap Fit Panel Mount IEC Inlets
-  EN60 320-1 Standard Sheet C14 Class I
-  Cold Condition
-  Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
-  Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab, /TERM - Screw Terminal, /PC - PCB Spills
-  Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colour only - see data for details)
-  PCB Mount version (part codes containing /PC) available with rear cover (part codes suffixed /C), for all other versions Insulation Boot for rear of connector available separately (part code 11328)
-  Mate with PX0587, PX0587/SE, PX0588

## // General Information:

Product Display Title:	Snap Fit Panel Mount IEC Inlets
Product Family:	IEC Connectors
Product Series:	IEC60320 Main Inlets and Outlets
Approvals:	cULus
Body Material:	Nylon 66
Current Max:	10A, 15A
Flamability Rating:	UL94V-0
Function:	Panel Mount Connector
iec Connector Colour:	Grey
iec Connector Mates With:	PX0587,PX0587/SE,PX0588
iec En60620 Type:	EN60 320-1 Standard Sheet C14 Class I
Max Operating Temperature:	+70°C
Min Operating Temperature:	-40°C
Max Panel Thickness:	2mm
Min Panel Thickness:	2mm
Number Of Contacts:	3 Contacts
Voltage Max:	250V


### // Product PDF Links

 [IEC Connectors product data](#)

### // Product 3D CAD Model Links

 [PX0575/20/63/GY3D CAD Model](#)

### // Product Certificate Links

 [UL E70394 Certificate](#)