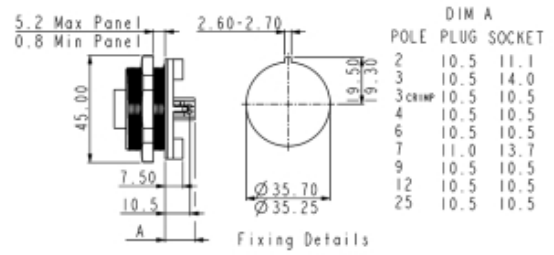


**Product Name // Rear Panel Mount Connector PX0708**  
**Range 3 Contact Plug Crimp Termination (Contacts Supplied Loose) Yellow Insert**

[View Product Page](#)


### // Product Description:

- ⊗ Rear Panel Mount Connectors
- ⊗ Water and dustproof to IP68 when mated with compatible connector
- ⊗ Single hole fixing
- ⊗ Plug or Socket
- ⊗ 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- ⊗ Screw, Crimp, Crimp/Solder Terminations available depending on part code and number of Contacts
- ⊗ Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)
- ⊗ Choice of coloured inserts to enable positive visual identification of connector:
- ⊗ Part codes suffixed with a colour code followed by 2 have that colour insert
- ⊗ Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)
- ⊗ PX0711 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⊗ Mate with PX07 Series Flex Connectors

### // General Information:

Product Display Title:	Rear Panel Mount Connectors
Product Family:	Circular Power Connectors
Product Series:	Standard Buccaneer
Approvals:	CSA, UL, VDE
Body Material:	Polyamide (PA)
Body Material Type:	Plastic Body
Contact Type:	Plug Contact
Coupling Type:	Screw
Current Max:	10A, 12A
Diameter Over Coupling Ring Mm:	38.1mm
Flamability Rating:	UL94V-0
Function:	Rear Panel Mount Connector
Insert Colour:	Yellow Insert
Ip Rating:	IP68, IP69K
Max Operating Temperature:	+70°C
Min Operating Temperature:	-20°C
Number Of Contacts:	3 Contacts
Voltage Max:	277V

#### // Product PDF Links

[Standard Series power connectors...](#)
[Standard Series power connectors...](#)

#### // Product 3D CAD Model Links

[PX0708/P/03/YL23D CAD Model](#)