PX0849/A Datasheet

Product Name // Rear Panel Mount Leaded USB Connector PX0849 Series Sealed A Socket Front of Panel to 5 Way Header

View Product Page



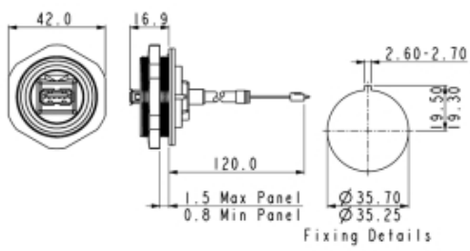

// Product Description:

- Rear Panel Mount Leaded Connector
- Water and dustproof to IP68 when mated with compatible connector
- Sealed Standard USB socket to 115mm long cable terminated in 5 way header
- PX0849/A has Sealed Standard USB Type A socket on front of panel
- PX0849/B has Sealed Standard USB Type B socket on front of panel
- PX0711 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX0840, PX0841 USB Cables

// General Information:

Product Display Title:	Rear Panel Mount Leaded Connector
Product Family:	Circular Data Connectors
Product Series:	Standard Buccaneer - Ethernet
Body Material:	Polyester (PE) - Glass Filled
Body Material Type:	Plastic Body
Contact Type:	Socket Contact
Coupling Type:	Screw
Current Max:	1A
Data Cable Type:	USB Sealed A Socket to 5 Way Header
Diameter Over Coupling Ring Mm:	38.1mm
Flamability Rating:	UL94V-0
Ip Rating:	IP68, IP69K
Max Operating Temperature:	+70°C
Min Operating Temperature:	0°C
Number Of Contacts:	4 Contacts
Voltage Max:	30V

// Product PDF Links

Standard Series USB connectors...

// Product 3D CAD Model Links

PX0849/A3D CAD Model