
PXM0609NSANBK6883 Datasheet



Product Name // Black Anodised Aluminium Plug Connector - Cable Entry: 6.88-8.38mm





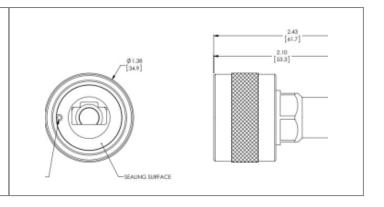

// Product Description:

- 0 Black Anodised Aluminium Plug Connector - Cable Entry: 6.88-8.38mm
- 0 IP68 rated when mated
- O Crimp Terminals
- 0 Durability >500 cycles

- Operating temperature -40°C to +100°C
- O Supports 10, 100 and 1,000 Mbps data transmissions
- O POE, POE+, and POE++
- O Hardware: Stainless Steel, Seals: Silicone

General Information:

Product Display Title: Black Anodised Aluminium Plug Connector - Cable Entry: 6.88-8.38mm

Circular Data Connectors **Product Family:**

Product Series: 600 Series - Ethernet Buccaneer Connectors

Is Vitalis: **Body Colour:** Black Body Length: 61.7mm **Body Material:** Aluminium **Body Material Type:** Metal Body

Connection Method: Standard RJ45 cable to be sourced Contact Type: Male

Coupling Type: Screw Diameter Over Coupling Ring Mm: 35mm Durability: >500 cycles **Ethernet Category:** Any

Plug Connector Function: IP68 Ip Rating: Material Finish: Anodised Max Cable Entry Size: 8.38mm 6.88mm Min Cable Entry Size: Min Operating Temperature: -40°C 43°C - 98% **Operating Humidity:** Max Operating Frequency: +100°C Rohs Compliant:

Salt Spray Corrosion Test: 500hr Shock Resistance: 100G - 6ms

// Product PDF Links // Product 3D CAD Model Links



