


# PXM6011/02S/CR/0709 Datasheet

**Product Name // Inline Cable Connector PXM6011 Series 2**  
**Contact Socket Crimp/Solder Termination (contacts available separately) 7mm-9mm Cable (Yellow Gland) Metal Body No Braid Termination**

 [View Product Page](#)

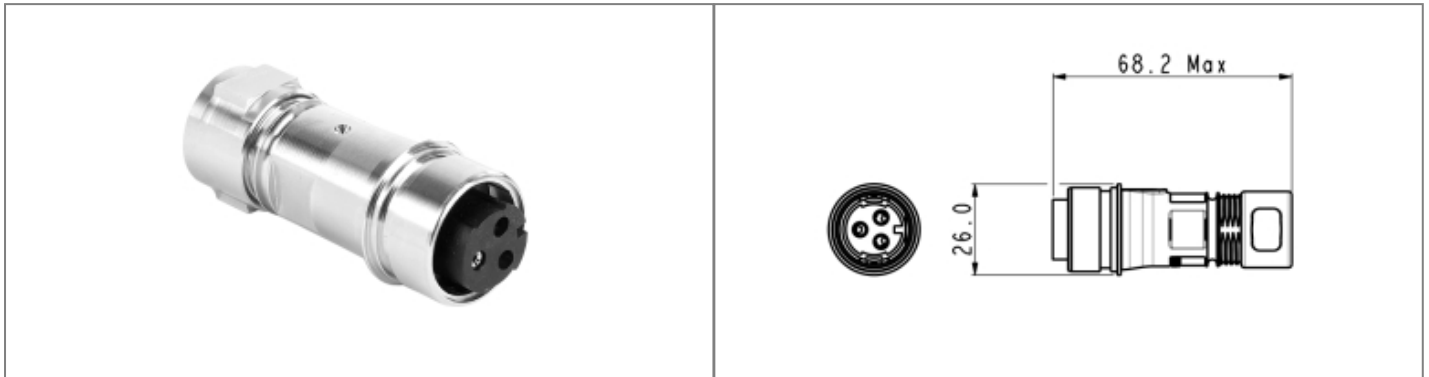

## // Product Description:

- ⬢ Inline Cable Connectors
- ⬢ Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- ⬢ 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- ⬢ Socket
- ⬢ 2 Contacts
- ⬢ Crimp/solder termination with contacts and fitting tool available separately
- ⬢ Metal Body No Braid Termination
- ⬢ Cable acceptance 7mm-9mm diameter
- ⬢ Gland Pack PXP6088 available separately to accommodate all sizes
- ⬢ PXM6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⬢ Mate with PXM6010 Series Flex Connectors

## // General Information:

Product Display Title:	Inline Cable Connectors
Product Family:	Circular Power Connectors
Product Series:	6000 Series Buccaneer
Approvals:	UL
Body Colour:	Metallic Grey
Body Material:	Brass
Body Material Type:	Metal Body No Braid Termination
Contact Type:	Socket Contact
Coupling Type:	Push-Twist
Current Max:	16A, 11A
Diameter Over Coupling Ring Mm:	32mm
Function:	Inline Cable Connector
Insulation Resistance:	>10 <sup>6</sup> MΩ @500V DC
Ip Rating:	IP66, IP68, IP69K
Max Cable Entry Size:	9mm
Min Cable Entry Size:	7mm
Max Contact Accomodation Awg:	14AWG
Min Contact Accomodation Awg:	18AWG
Max Contact Accomodation Mm2:	2.5mm <sup>2</sup>
Min Contact Accomodation Mm2:	0.75mm <sup>2</sup>
Max Operating Temperature:	+120°C
Min Operating Temperature:	-40°C
Number Of Contacts:	2 Contacts
Rohs Compliant:	Yes
Salt Spray Corrosion Test:	EN60068-2-11 Test Ka Salt Mist
Voltage Max:	277V

### // Product PDF Links



### // Product 3D CAD Model Links

