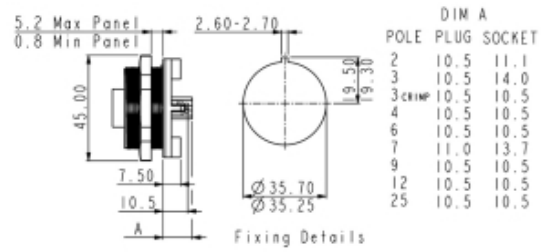


PXV0708/P/03 Datasheet

Product Name // Vitalis Buccaneer Rear Panel Mount Range (3 Contact)

[View Product Page](#)


// Product Description:

- ⬡ PXV0708/P/03 provides a PCF reduction of 9.0 kg CO₂e per 100 units compared to the equivalent Standard Series Buccaneer part number
- ⬡ Rear Panel Mount Connector
- ⬡ Water and dustproof to IP68 when mated with compatible connector
- ⬡ Single hole fixing
- ⬡ Plug contacts
- ⬡ 3 pole with leading Earth contact
- ⬡ Screw contacts, supplied fitted
- ⬡ PXV0711 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⬡ Mates with Standard Vitalis Series (PXV) and Standard Series (PX) Buccaneer Flex Connectors

// General Information:

Product Display Title:	Vitalis Buccaneer Rear Panel Mount Range (3 Contact)
Product Family:	Circular Power Connector
Product Series:	Standard Vitalis Buccaneer
Approvals:	UL, VDE
Body Colour:	Black
Body Material:	Polyamide (PA)
Body Material Type:	Plastic Body
Contact Type:	Plug Contact
Coupling Type:	Screw
Current Max:	10A, 12A
Diameter Over Coupling Ring Mm:	38.1mm
Flamability Rating:	UL94V-0
Function:	Rear Panel Mount Connector
Insert Colour:	Black Insert
Ip Rating:	IP68, IP69K
Max Contact Accomodation Awg:	16AWG
Min Contact Accomodation Awg:	17AWG
Max Contact Accomodation Mm2:	1.5mm ²
Min Contact Accomodation Mm2:	1mm ²
Max Operating Temperature:	+70°C
Min Operating Temperature:	-20°C
Number Of Contacts:	3 Contacts
Rohs Compliant:	Yes
Voltage Max:	277V

// Product PDF Links

[Standard Vitalis Buccaneer Product...](#)

// Product 3D CAD Model Links

[PXV0708/P/033D CAD Model](#)