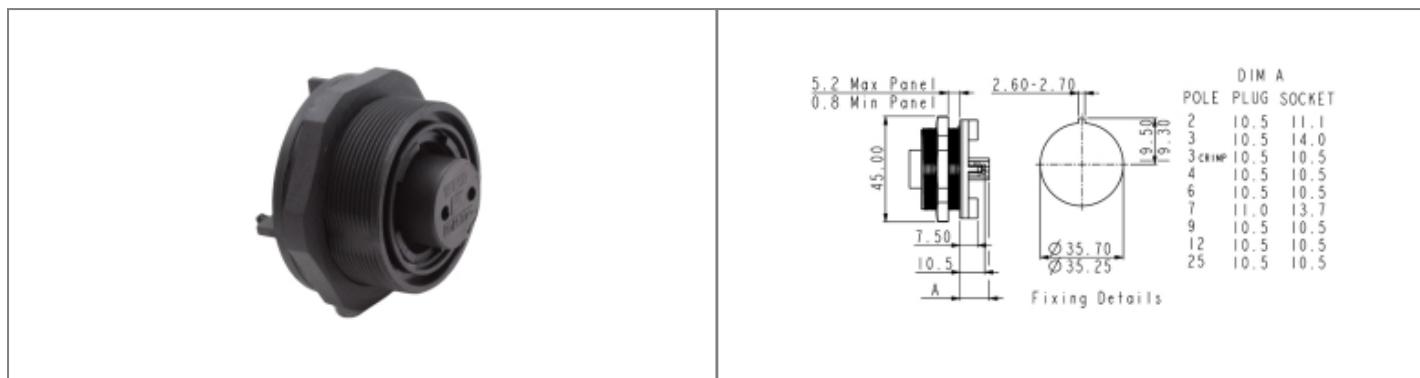


**Product Name // Vitalis Buccaneer Rear Panel Mount**  
**Range (7 Contact)**
[View Product Page](#)

**// Product Description:**

- ◊ PXV0709/S/07 provides a PCF reduction of 9.1 kg CO<sub>2</sub>e per 100 units compared to the equivalent Standard Series Buccaneer part number
- ◊ Rear Panel Mount Connector
- ◊ Water and dustproof to IP68 when mated with compatible connector
- ◊ Single hole fixing
- ◊ Socket contacts
- ◊ 7 pole
- ◊ Screw contacts, supplied fitted
- ◊ PXV0711 Sealing Cap available separately to maintain IP rating of unmated connectors
- ◊ Mates with Standard Vitalis Series (PXV) and Standard Series (PX) Buccaneer Flex Connectors

**// General Information:**

Product Display Title:	Vitalis Buccaneer Rear Panel Mount Range (7 Contact)
Product Family:	Circular Power Connector
Product Series:	Standard Vitalis Buccaneer
Approvals:	UL, VDE
Body Colour:	Black
Body Material:	Polyamide (PA)
Body Material Type:	Plastic Body
Contact Type:	Socket Contact
Coupling Type:	Screw
Current Max:	3A, 5A
Diameter Over Coupling Ring Mm:	38.1mm
Flamability Rating:	UL94V-0
Function:	Rear Panel Mount Connector
Insert Colour:	Black Insert
IP Rating:	IP68, IP69K
Max Contact Accommodation Awg:	16AWG
Min Contact Accommodation Awg:	17AWG
Max Contact Accommodation Mm2:	1.5mm <sup>2</sup>
Min Contact Accommodation Mm2:	1mm <sup>2</sup>
Max Operating Temperature:	+70°C
Min Operating Temperature:	-20°C
Number Of Contacts:	7 Contacts
Rohs Compliant:	Yes
Voltage Max:	277V

**// Product PDF Links**
[Standard Vitalis Buccaneer Product...](#)
**// Product 3D CAD Model Links**
[PXV0709/S/073D CAD Model](#)