
RF240A2JEGCEBF Datasheet



View Product Page

Product Name // 2.4mm Jack Straight 2 Hole Flange RF

Connector

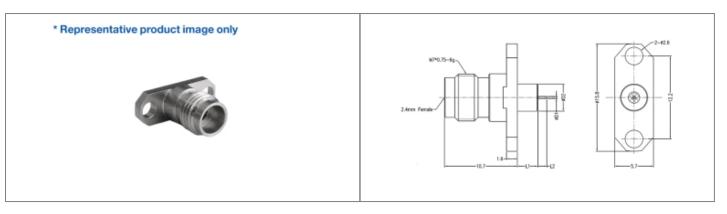

// Product Description:

- O 2.4mm Jack Straight 2 Hole Flange RF Connector
- O Maximum Voltage: 150V
- O Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 50GHz
- O VSWR:

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper


// General Information:

Product Display Title: **Product Family: Product Series:** Body Length: **Body Material:** Centre Contact Retention Force: Contact Pin Material: Min Coupling Torque: Max Coupling Torque: Dielectric Withstanding Voltage: Durability: Flange Mount Length: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Voltage Max: Vswr:

2.40mm Series Pin with Extended PTFE 2 Hole Flange Radio Frequency Connectors 2.40mm Series 10.80mm Stainless Steel Passivation >20N Beryllium Copper 0.80Nm 1.10Nm >500V >500 cycles 15.80mm Female Flange Mount RF Connector 500hm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 12.20mm 0GHz 50GHz 0.60mm 1.90mm 2.00mm 5.10mm 150V <1.30

// Product PDF Links

2.40mm Series Product Datasheet



RF240A2JEGCEBF3D CAD Model