


# RF240A2JEGCEBF Datasheet

## Product Name // 2.4mm Jack Straight 2 Hole Flange RF Connector

[View Product Page](#)

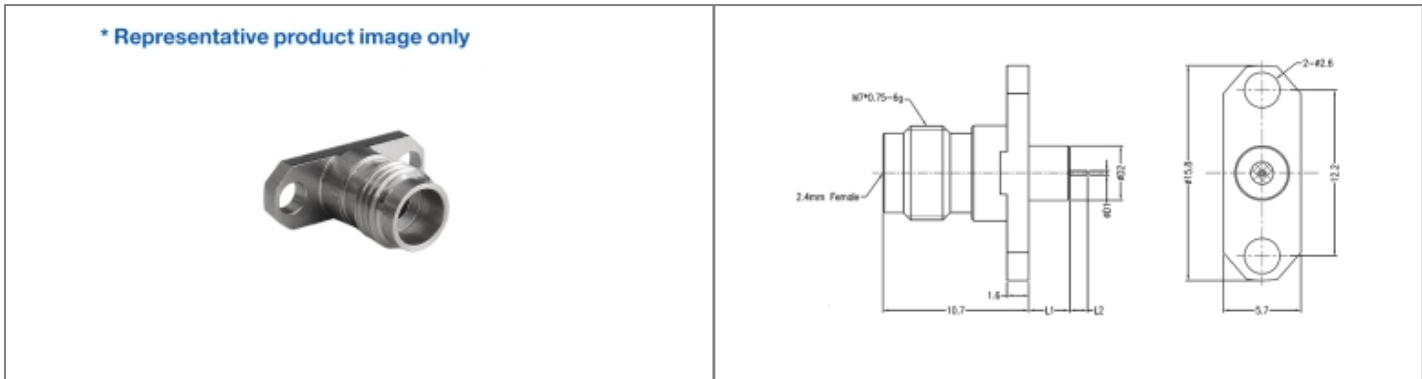

// Product Description:	
<ul style="list-style-type: none"> <li>2.4mm Jack Straight 2 Hole Flange RF Connector</li> <li>Maximum Voltage: 150V</li> <li>Temperature range: -40°C to +85°C</li> <li>Frequency range: 0GHz - 50GHz</li> <li>VSWR: &lt;1.30</li> </ul>	<ul style="list-style-type: none"> <li>Dielectric withstanding Voltage: &gt;500V</li> <li>Impedance: 50Ohm</li> <li>Body Material: Stainless Steel Passivation</li> <li>Contact Material: Beryllium Copper</li> </ul>

// General Information:	
Product Display Title:	2.40mm Series Pin with Extended PTFE 2 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	2.40mm Series
Body Length:	10.80mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>500V
Durability:	>500 cycles
Flange Mount Length:	15.80mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	UNFILLED ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Mount Hole Distance:	12.20mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	50GHz
Pin Diameter:	0.60mm
Pin Length:	1.90mm
Ptfe Diameter:	2.00mm
Ptfe Length:	5.10mm
Voltage Max:	150V
Vswr:	<1.30

// Product PDF Links

[2.40mm Series Product Datasheet](#)

// Product 3D CAD Model Links

[RF240A2JEGCEBF3D CAD Model](#)