
RF292A2JDFADGA Datasheet



🗱 View Product Page

Product Name // 2.92mm Jack Straight 2 Hole Flange RF

Connector

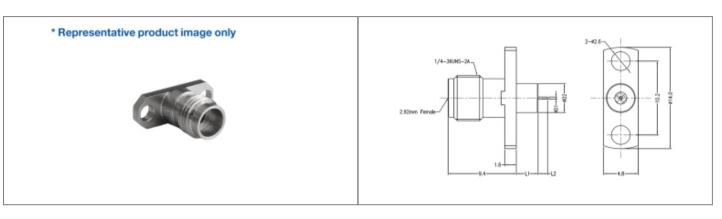

// Product Description:

- O 2.92mm Jack Straight 2 Hole Flange RF Connector
- O Maximum Voltage: 250V
- O Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm

Radio Frequency Connectors

- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:
Product Family:
Product Series:
Body Length:
Body Material:
Centre Contact Retention Force:
Contact Pin Material:
Min Coupling Torque:
Max Coupling Torque:
Dielectric Withstanding Voltage:
Durability:
Flange Mount Length:
Function:
Impedance:
Insulation Resistance:
Insulator:
Max Operating Temperature:
Min Operating Temperature:
Mount Hole Distance:
Min Operating Frequency:
Max Operating Frequency:
Pin Diameter:
Pin Length:
Ptfe Diameter:
Ptfe Length:
Thread Size:
Voltage Max:
Vswr:

2.92mm Series 9.40mm Stainless Steel Passivation >20N Beryllium Copper 0.80Nm 1.10Nm >750V >500 cycles 14.00mm

2.92mm Series Pin with Extended PTFE 2 Hole Flange

Female Flange Mount RF Connector 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 10.20mm 0GHz 40GHz 0.30mm 1.50mm 4.00mm 1.40mm 1/4 36UNS 2A 250V <1.30

// Product PDF Links

2.92mm Series Product Datasheet



RF292A2JDFADGA3D CAD Model