RF292A2JEGA Datasheet




Product Name // 2.92mm Jack Straight 2 Hole Flange RF Connector



* Representative product image only



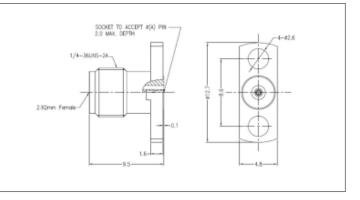

// Product Description:

- 2.92mm Jack Straight 2 Hole Flange RF Connector
- Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 40GHz
- 0 VSWR: <1.30

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title: Product Family: Product Series: Body Length: **Body Material:**

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Insulation Resistance:

Insulator:

Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter: Thread Size:

Function: Impedance:

Max Operating Temperature: Min Operating Temperature:

Voltage Max: Vswr:

2.92mm Series Socket 2 Hole Flange

Radio Frequency Connectors

2.92mm Series

9.50mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm 1.10Nm >750V

>500 cycles 15.80mm

Female Flange Mount RF Connector

50Ohm >5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 12.20mm 0GHz 40GHz 0.23mm 1/4 36UNS 2A 250V <1.30

// Product PDF Links



// Product 3D CAD Model Links



RF292A2JEGA3D CAD Model