## RF292A4JCCADAA Datasheet




## Product Name // 2.92mm Jack Straight 4 Hole Flange RF Connector

View Product Page

\* Representative product image only



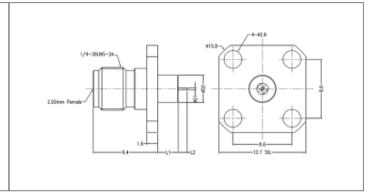

## // Product Description:

- 0 2.92mm Jack Straight 4 Hole Flange RF Connector
- 0 Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 40GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

## // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

**Body Length: Body Material:** 

**Centre Contact Retention Force:** 

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

**Durability:** 

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency:

Max Operating Frequency:

Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Thread Size:

Voltage Max:

Vswr:

2.92mm Series Pin with Extended PTFE 4 Hole Flange

Radio Frequency Connectors

2.92mm Series

9.50mm

Stainless Steel Passivation

Beryllium Copper

0.80Nm

1.10Nm >750V

>500 cycles

12.70mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 8.60mm

0GHz 40GHz 0.30mm 1.50mm 1.67mm

1.40mm

1/4 36UNS 2A

250V <1.30

// Product PDF Links



2.92mm Series Product Datasheet

// Product 3D CAD Model Links



RF292A4JCCADAA3D CAD Model