


Product Name // 2.92mm Plug Edge Launch PCB RF Connector
 [View Product Page](#)

* Representative product image only

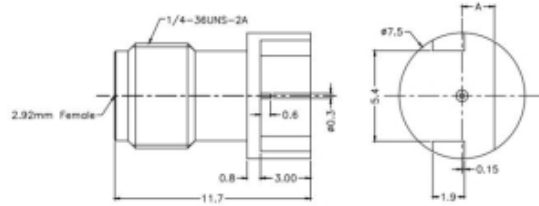

// Product Description:

- | | |
|--|---|
| <ul style="list-style-type: none"> ⊗ 2.92mm Plug Edge Launch PCB RF Connector ⊗ Maximum Voltage: 250V ⊗ Temperature range: -55°C to +125°C ⊗ Frequency range: 0GHz - 40GHz ⊗ VSWR: <1.25 | <ul style="list-style-type: none"> ⊗ Dielectric withstanding Voltage: >750V ⊗ Impedance: 50Ohm ⊗ Body Material: Stainless Steel ⊗ Contact Material: Beryllium Copper |
|--|---|

// General Information:

Product Display Title:	2.92mm Series Edge Launch Connector
Product Family:	Radio Frequency Connectors
Product Series:	2.92mm Series
Body Length:	14.87mm
Body Material:	Stainless Steel
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female Edge Launch RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	UNFILLED ULTEM 1000/PEI
Max Operating Temperature:	+125°C
Min Operating Temperature:	-55°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	40GHz
Pcb Thickness:	1.88mm
Thread Size:	1/4 36UNS 2A
Voltage Max:	250V
Vswr:	<1.25

// Product PDF Links

 [2.92mm Series Product Datasheet](#)

// Product 3D CAD Model Links

 [RF292CPD3D CAD Model](#)