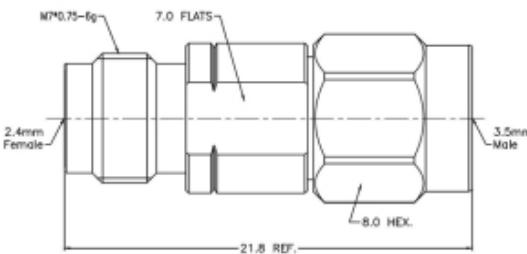


**Product Name // 2.4mm Plug to Jack RF Adapter**
[View Product Page](#)
*\* Representative product image only*

**// Product Description:**

- 2.4mm Plug to Jack RF Adapter
- Maximum Voltage: 150V
- Temperature range: -40°C to +85°C
- Frequency range: 0GHz - 50GHz
- VSWR: <1.20
- Dielectric withstanding Voltage: >500V
- Impedance: 50Ohm
- Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

**// General Information:**

Product Display Title:	RF Adapter Series 2.40mm Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	18.60mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>500V
Durability:	>500 cycles
Function:	Male to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	50GHz
Thread Size:	M7x0.75 6g
Voltage Max:	150V
Vswr:	<1.20

**// Product PDF Links**
[PDF RF Adapter Series Product...](#)
**// Product 3D CAD Model Links**
[IGES RFAA240P240J3D CAD Model](#)