


# RFAA350J350P Datasheet

## Product Name // 3.5mm Jack to Plug RF Adapter

[View Product Page](#)

\* Representative product image only

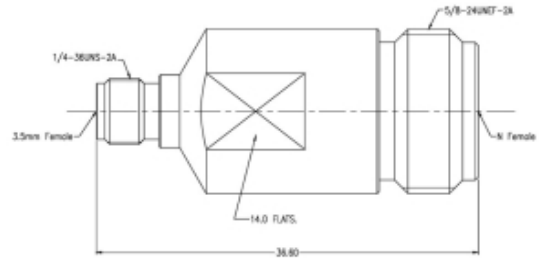

### // Product Description:

- ⊕ 3.5mm Jack to Plug RF Adapter
- ⊕ Maximum Voltage: 335V
- ⊕ Temperature range: -40°C to +85°C
- ⊕ Frequency range: 0GHz - 33GHz
- ⊕ VSWR: <1.20
- ⊕ Dielectric withstanding Voltage: >750V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

### // General Information:

Product Display Title:	RF Adapter Series 3.50mm Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	20.50mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Male to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	33GHz
Voltage Max:	335V
Vswr:	<1.20

#### // Product PDF Links

[RF Adapter Series Product...](#)

#### // Product 3D CAD Model Links

[RFAA350J350P3D CAD Model](#)


Have a question or project enquiry  
you'd like to talk to us about?



[Click Here To Contact Us](#)