RFSMAA2JCCHP Datasheet




Product Name // SMA Straight Jack 2 Hole Flange RF Connector

View Product Page

* Representative product image only



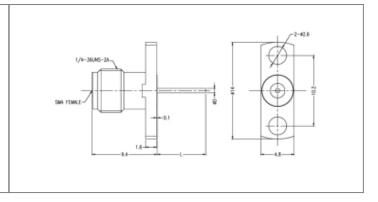

// Product Description:

- 0 SMA Straight Jack 2 Hole Flange RF Connector
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 26.5GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family: Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Coupling Nut Retention Force: Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Thread Size: Voltage Max:

Vswr:

SMA Series Pin without Extended PTFE 2 Hole Flange

Radio Frequency Connectors

SMA Series 9.40mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm 1.10Nm >27.2Kg >750V

>500 cycles 12.70mm

Female Flange Mount RF Connector

500hm >5000MOhm

Adapter ASTM D 1710

+165°C -65°C 8.60mm 0GHz 26.5GHz 0.87mm 10.92mm 1/4 36UNS 2A

335V <1.30

// Product PDF Links



SMA Series Product Datasheet

// Product 3D CAD Model Links



RFSMAA2JCCHP3D CAD Model