RFSMAA2JEGHR Datasheet




Product Name // SMA Straight Jack 2 Hole Flange RF Connector

View Product Page

* Representative product image only



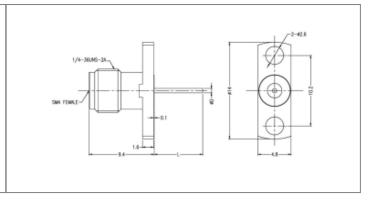

// Product Description:

- 0 SMA Straight Jack 2 Hole Flange RF Connector
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 26.5GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family:

Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque: **Coupling Nut Retention Force:**

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Thread Size: Voltage Max: Vswr:

SMA Series Pin without Extended PTFE 2 Hole Flange

Radio Frequency Connectors

SMA Series 9.40mm

Stainless Steel Passivation

>26.7N

Beryllium Copper 0.80Nm

1.10Nm >27.2Kg >750V >500 cycles 15.80mm

Female Flange Mount RF Connector

500hm >5000MOhm

Adapter ASTM D 1710

+165°C -65°C 12.20mm 0GHz 26.5GHz 0.87mm 26.00mm 1/4 36UNS 2A 335V <1.30

// Product PDF Links



// Product 3D CAD Model Links



RFSMAA2JEGHR3D CAD Model